




DS-28 Hyper-cardioid Condenser Microphone

The E-IMAGE DS-28 is a ultra-lightweight shotgun microphone, which can improve the sound quality of videos on the basis of build-in microphones. With TRS cable output included, it can be used for DSLR cameras, camcorders, audio recorders, and more. It also features a 1/4" mount that can be mounted on a camera or boompole, and ideals for Youtubers, Vloggers, and more.

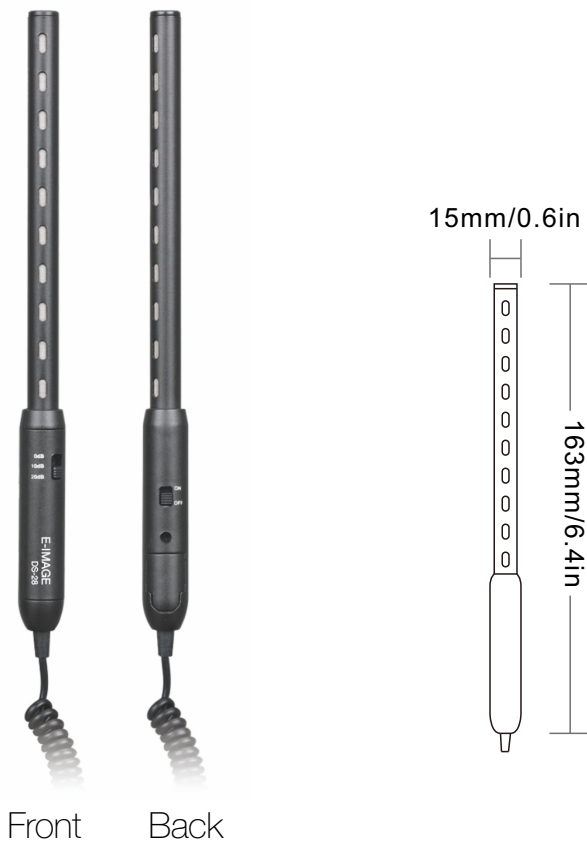

COMPONENT



DS-28 microphone	1pc
Foam windscreen	1pc
Microphone holder	1pc



SPECIFICATIONS

Element	Back Electret Condenser
Polar Pattern	Hyper-cardioid
Frequency Response	40Hz-16kHz
Bass	Built-in
Sensitivity	-43dB±3dB(1dB=1V/Pa at 1kHz)
Output Impedance	≤300Ω±20%(at 1kHz)
Max.Input SPL	130dB(T.H.D≤1% at 1kHz)
Signal to Noise Ratio	76dB(1kHz at 1Pa)
Power Requirements	DC 3V (CR2,3V)
Weight	205g
Dynamic Range	106dB(1kHz at Max SPL)
Body Dimensions	205g
Output Interface	3.5 Audio Interface

FEATURES

